

# SureCall Flare 3.0 CA

Most Powerful Cell Signal Booster with Simplified Install for Home and Office

#### Overview

The SureCall Flare 3.0 CA is the most powerful cell phone signal booster in its class, designed to improve voice and 4G LTE data signals for all Canadian carriers. Equipped with SureCall's exclusive 2XP technology, uplink transmission power is doubled when compared to the closest competitor to keep all devices connected in the weakest signal environments.


Flare 3.0 CA comes kitted with a powerful outdoor Yagi antenna and patented signal booster, which combine the amplifier and indoor antenna into an attractive housing that is designed to be placed on an open tabletop or bookshelf, streamlining system's design for easier install and a smaller footprint.

- Extends coverage inside any home, cabin or small building in 2-4 rooms, up to 3,500 sq ft
- Exclusive 2XP technology delivers twice the signal power to the tower when compared to the closest competitor to keep all devices connected in weak signal areas
- 4G & 5G Phone Compatible Boosts voice and 4G LTE data signals on all cellular devices
- Supports multiple users simultaneously
- Assembled and tested in the USA
- Backed by industry leading 3-year manufacturer's warranty

## Package Contents

The Flare 3.0 CA includes: Flare 3.0 CA booster with built-in indoor antenna, power supply, 50 ft. RG-11 coax cable, Yagi antenna and Quick Setup Guide

## Installation Example

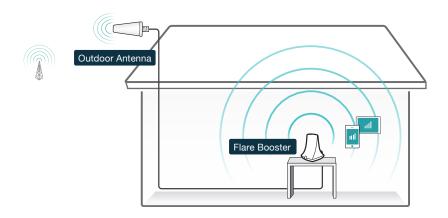



#### The SureCall Flare 3.0 CA signal booster

#### **Specifications**

Uplink Frequency :	698-716 / 776-787 / 824-849 / 1710-1755 / 1850-1915 (MHz)
Downlink Frequency :	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155 (MHz)
Max Gain:	72 dB
Impedance:	$75\Omega$ in / $50\Omega$ out
VSWR :	≤2.0
Cable:	RG-11 (50 ft)
AC Power :	Input: AC 110 – 240 V, 60 Hz ; Output: DC 5V / 3A
RF Connectors :	F Female
ISED :	7784A-FLARE3

▶ Patent No. US 8,867,572 B1; US 9,100,839 B2

Part: SC-Flare3CA rev 060320 upc: 854328008763

